




energy
conservation
TECHNOLOGIES



Confidence Even Under Fire

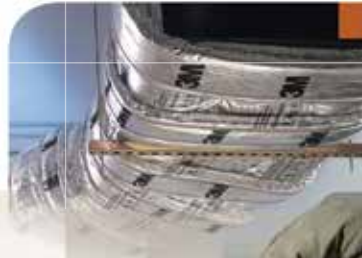

Through-Penetration Specialty Products



3M™ Fire Barrier Wrap Ultra GS

Flexible, intumescent wrap strip expands when exposed to high temperatures.

- Up to 3-hour fire ratings per ASTM E 814 (UL 1479)
- Excellent weatherability
- For use in drain, waste, vent or closed pipe systems
- Easily cut and shaped with common tools
- Used to firestop the following plastic pipes: ccPVC, PVC, FRPP, PVDF, ccABS and ABS
- Provides a smoke seal when used in conjunction with 3M™ Fire Barrier Sealant (CP 25WB+, IC 15WB+, 3000 WT) or 3M™ Fire Barrier Moldable Putty MP+



3M™ Fire Barrier Wrap Ultra GS

Product	Product Number	Description	Size	Unit	Shipping Wt./Case	Billing UPC Number	Qty.	Price Unit
Ultra GS FIRE BARRIER  	ULTRA-GS-40	Intumescent wrap for insulated pipes, plastic pipes and combos (Up to 4-hr Firestop)	2 in. x 40 ft. (1/8 in. thick)	Roll	29.0 lbs.	000-51115-16507-8	5/Cs	Each

Energy Conservation Technologies

Unit 1 / 251 Ferntree Gully Road
Mount Waverley Vic 3149

Phone 1300 742 296

Email enquires@energycontech.com

Web www.energycontech.com